




Roca

Brick Metallic

Brick Metallic

Glazed Porcelain


8.5 mm |  | 3"x12"
7.7x30.5 cm

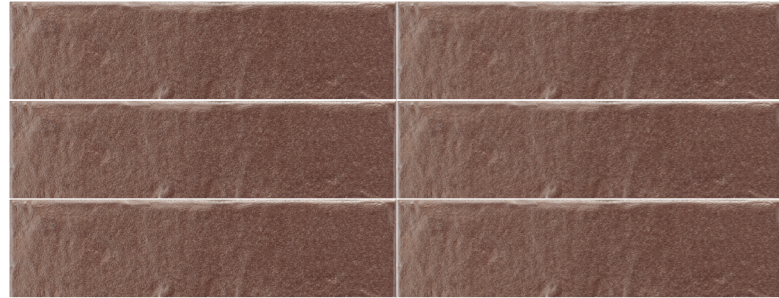


Cobre



3"x12"
FIE011PO21

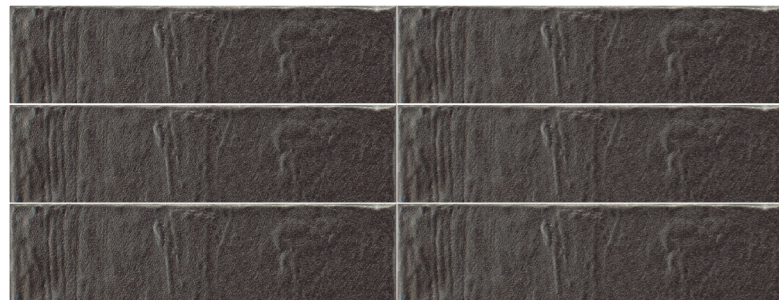

Iron



3"x12"
FBC011PO21

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	335
Scratch Hardness	MOH's Scale	5
Chemical Resistance	C650	Unaffected
Frost Resistance	C1026	Resistant
Group	SEE FAQs	2
PEI - Glazed Tiles	C1027	2
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction (DCOF)	A137.1	<0.42
Shade and Texture Rating	CTDA "V"	V2
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Packaging Info

Size	SF per carton	PC per carton
3"x12"	10.98	46