

**Roca**

**Piasentina**



# Piasentina

The traditional and elegant Piasentina stone is the inspiration of this porcelain tile, highly resistant and versatile. For both commercial and residential projects that strive to evoke sophistication and delicacy.



Piasentina Silver 24"x48" R PO & UP


**Glazed & Polished Porcelain**

◇ □ 24"x48" R - 12"x24" R





Piasentina Smoke 24"x48" PO & 13"x13" Mosaic

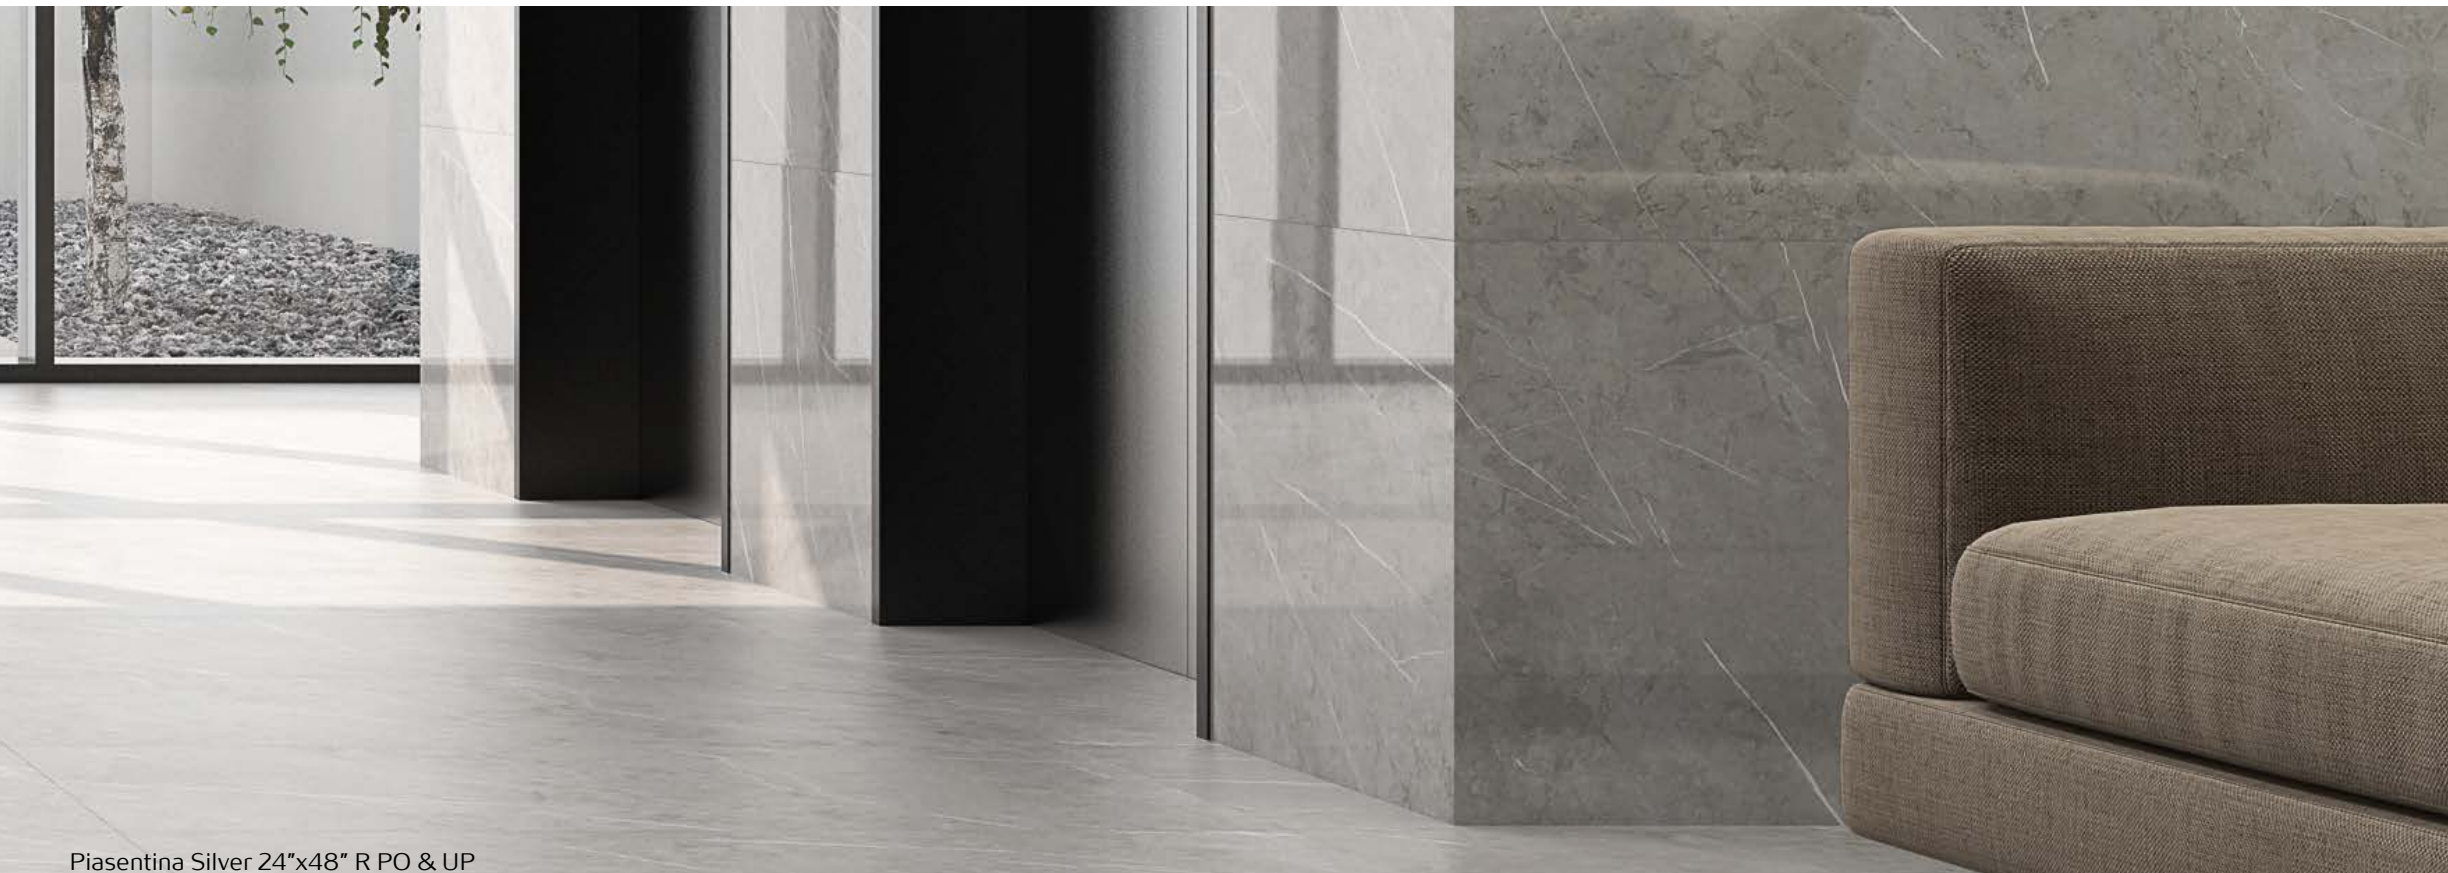

Piasentina Silver 24"x48" R PO & UP



# Piasentina


Glazed & Polished Porcelain



**24"x48" R** 60x120 cm  
**12"x24" R** 30x60 cm



## Silver



**24"x48" R UP**  
UPIASGP2448R



**24"x48" R PO**  
UPIASPO2448R



**12"x24" R UP**  
UFPIASL-1224



**12"x24" R PO**  
UFPIASL-1224PO



**13"x13" UP Mosaic**  
UFPIASL-13M



**3"x12" UP Bullnose**  
UFPIASL-S4312



## Smoke



**24"x48" R UP**  
UPISMGP2448R



**24"x48" R PO**  
UPISMPO2448R



**12"x24" R UP**  
UFPIASM-1224



**12"x24" R PO**  
UFPIASM-1224PO



**13"x13" UP Mosaic**  
UFPIASM-13M



**3"x12" UP Bullnose**  
UFPIASM-S4312

# Piasentina

Glazed & Polished Porcelain

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM	
		Unpolished	Polished
Water Absorption	C373	<=0.5%	<=0.5%
Break Strength	C648	Min. 335	Min. 335
Scratch Hardness	MOH's Scale	5	3
Chemical Resistance	C650	Unaffected	Unaffected
Frost Resistance	C1026	Resistant	Resistant
Group	See FAQ's	4	3
Deep Abrasion - Unglazed Tiles	C1043	Pass	Pass
PEI- Glazed Tiles***	C1027	4	3
Minimum Bond Strength (PSI)	C482	165	165
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42	<=0.40
Shade and Texture Rating	CTDA "V"	V2	V2
Facial Dimensions	C499	Pass	Pass
Range of Thickness	C499	Pass	Pass
Warpage	C485	Pass	Pass
Wedging	C502	Pass	Pass

## Packaging Info

Size	SF per carton	PC per carton	BX per pallet
12"x24" R	18.94	10	32
24"x48" R	22.96	3	28
13"x13" Mosaic	13.15	11	54
3"x12" Bullnose	5.92	24	120