



**Roca**

# Abbey



Abbey Fresno 8" x 48" R

## Abbey

The Abbey collection will give any interior the warm charm of untreated wood. A simple, unadorned floor that expresses its naturalness in long planks playing tribute to rustic floors.


### Glazed Porcelain

- ◇ 8"x48" R
- 16"x48"R, 12"x36" R




Abbey Fresno 8"x48" R - Suite Abbey Fresno 12"x36" R

This Full Body Porcelain floor tile unfolds in traditional colors and shades: Fresno, Roble, Vison, and Gris. A high quality porcelain proposal with a natural or antislip finish for outdoor or water areas.

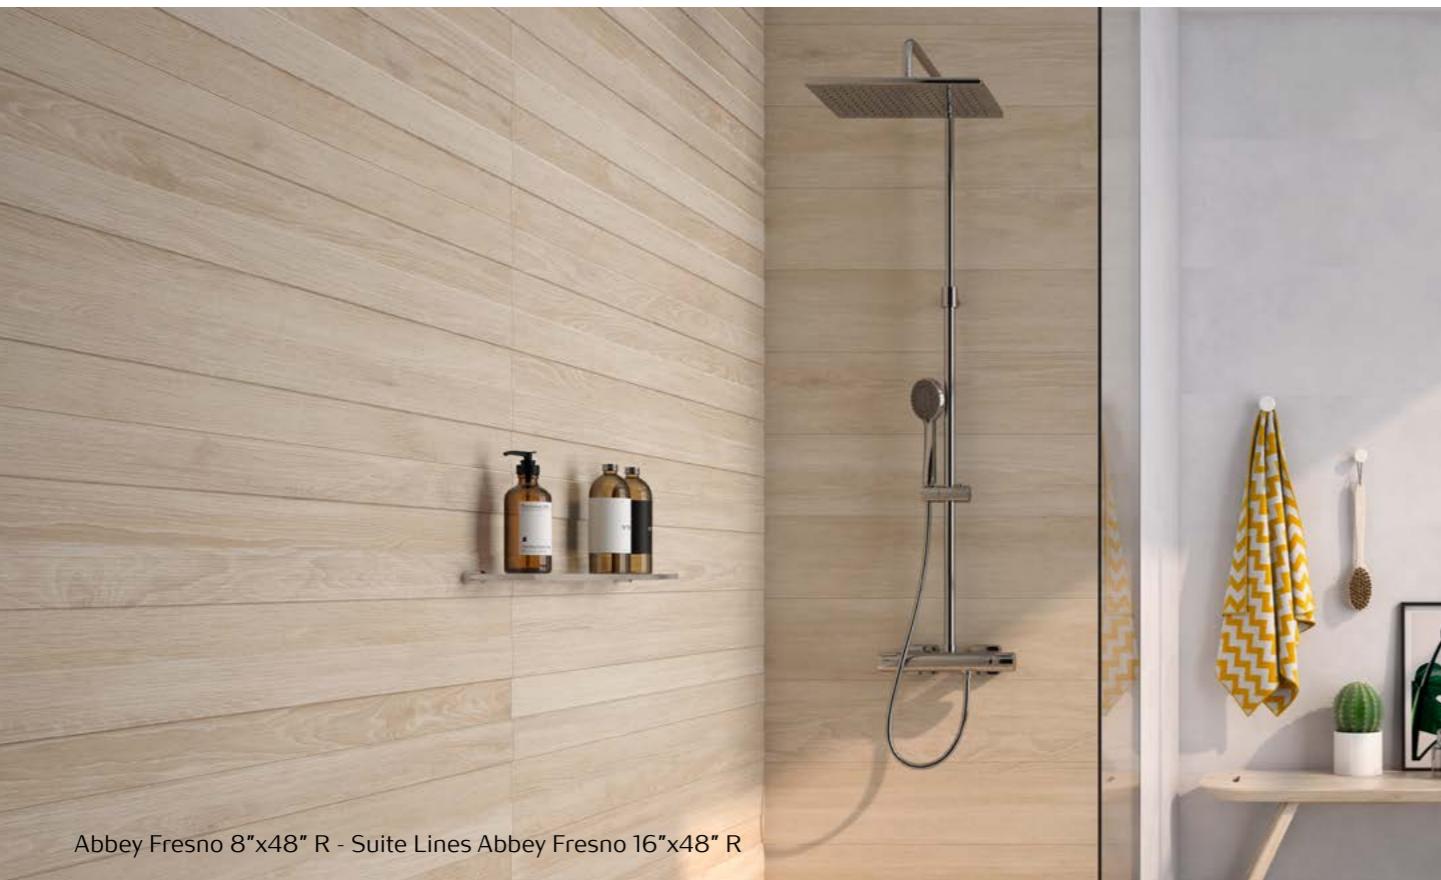

Abbey Fresno 8"x48" R - Suite Lines Abbey Fresno 16"x48" R

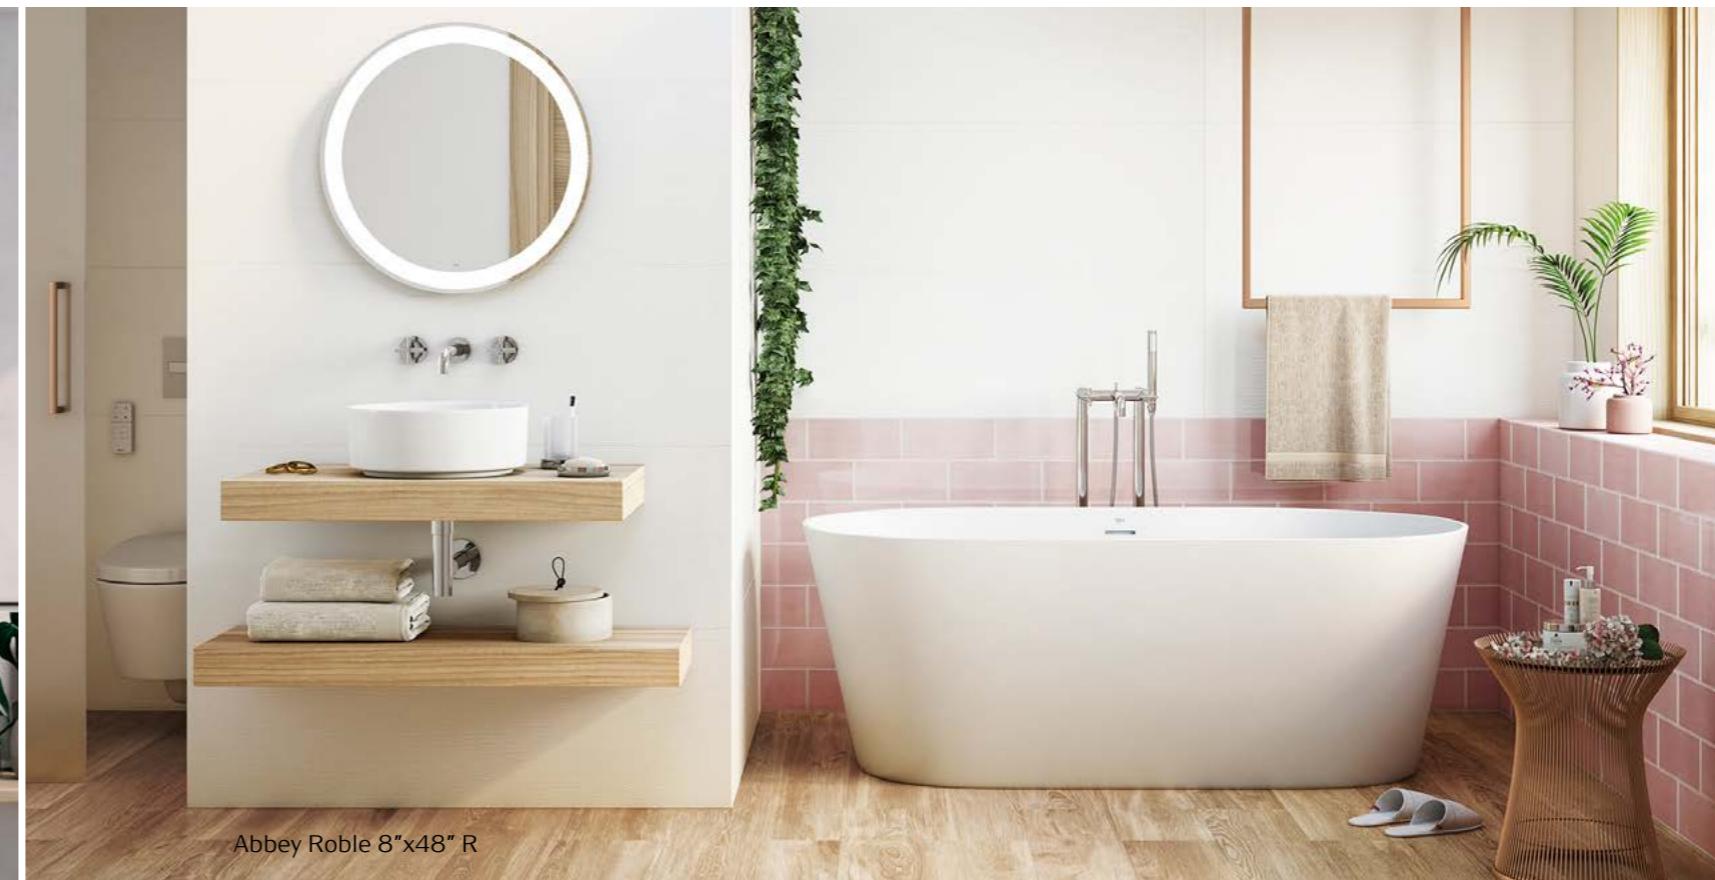

Abbey Roble 8"x48" R

# Abbey

Glazed Porcelain

7 mm |         | 8"x48" R  
19.5x120 cm



**Fresno**

 8"x48" R  
FN8WOFP831

 8"x48" R ABS  
FN8WAFP831



**Roble**

 8"x48" R  
FN8WOFP741

 8"x48" R ABS  
FN8WAFP741



**Gris**

 8"x48" R  
FN8WOFP021

 8"x48" R ABS  
FN8WAFP021




**Vision**

 8"x48" R  
FN8WOFP141

 8"x48" R ABS  
FN8WAFP141

# Abbey


## Ceramic Wall



12"x36" R  
30x90cm



### Suite Roble



12"x36" R  
FOA3TAW741

### Technical Specifications (Floor)

| CHARACTERISTICS                        | STANDARD    | DECLARED ASTM |
|--|-------------|---------------|
| Water Absorption                       | C373        | <=0.5%        |
| Break Strength                         | C648        | Min. 290      |
| Scratch Hardness                       | MOH's Scale | 7             |
| Chemical Resistance                    | C650        | Unaffected    |
| Frost Resistance                       | C1026       | Resistant     |
| Group                                  | See FAQ's   | 4             |
| Deep Abrasion - Unglazed Tiles         | C1243       | Pass          |
| PEI - Glazed Tiles                     | C1027       | -             |
| Minimum Bond Strength (PSI)            | C482        | 165           |
| Dynamic Coefficient of Friction (DCOF) | A137.1      | <=0.50        |
| Shade and Texture Rating               | CTDA "V"    | V3            |
| Facial Dimensions                      | C499        | Pass          |
| Range of Thickness                     | C499        | Pass          |
| Warpage                                | C485        | Pass          |
| Wedging                                | C502        | Pass          |

### Technical Specifications (Wall)

| CHARACTERISTICS          | STANDARD    | DECLARED ASTM   |
|--------------------------|-------------|-----------------|
| Water Absorption         | C373        | >10%            |
| Break Strength           | C648        | Meet or Exceeds |
| Scratch Hardness         | MOH's Scale | -               |
| Chemical Resistance      | C650        | Unaffected      |
| Shade and Texture Rating | CTDA "V"    | V2              |
| Warpage                  | C485        | Pass            |
| Wedging                  | C502        | Pass            |

### Packaging Information

| Size    | SF per carton | PC per carton | BX per pallet |
|---------|---------------|---------------|---------------|
| 8"x48"  | 20.15         | 8             | 48            |
| 12"x36" | 14.56         | 5             | 51            |