



Roca

Baltic



COLOR BODY PORCELAIN

Baltic

Inspired by the Baltic Sea's windswept sands, this collection captures the serene beauty of northern shores. Its earthy tones bring warmth and harmony, while its versatile design ensures easy installation on floors and walls. Combining natural elegance with practicality, it adds timeless charm to any space.

Baltic Sand 24"x48" R / 12"x24" R / 12"x12" Mosaic

Color Body Porcelain

24"x48" R 12"x24" R 12"x12" Mosaic



Baltic Tan 24"x48"R / 12"x12" Mosaic



Baltic Granite 12"x24" R



Baltic Sand 12"x24"R / 12"x12" Mosaic

8-8.5

mm

M

V3

24"x48" R

59.7x119.7 cm

12"x24" R

29.7x59.7 cm

12"x12"

30x30 cm



Sand



24"x48" R
UBALTIMTLBU



12"x24" R
UBALTIMT6HU



12"x12" Mosaic
UBALT11212U



Tan



24"x48" R
UBALTIMTLBE



12"x24" R
UBALTIMT6HE



12"x12" Mosaic
UBALT11212E



Granite



24"x48" R
UBALTIMTLBI



12"x24" R
UBALTIMT6HI



12"x12" Mosaic
UBALT11212I

8-8.5


mm

M

V3

24"x48" R


59.7x119.7 cm

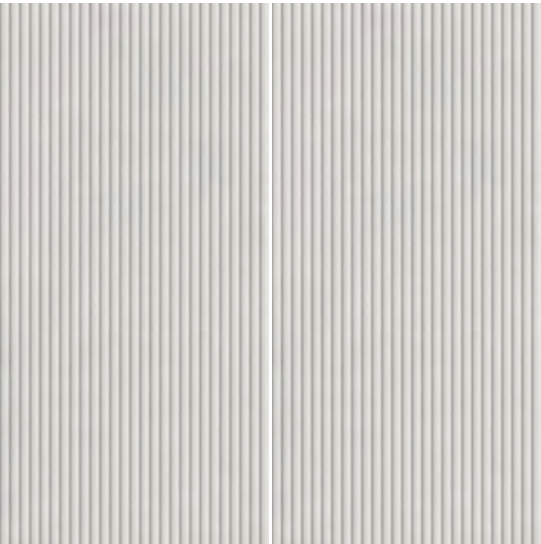

Sand




24"x48" R
UBALTIWALBU

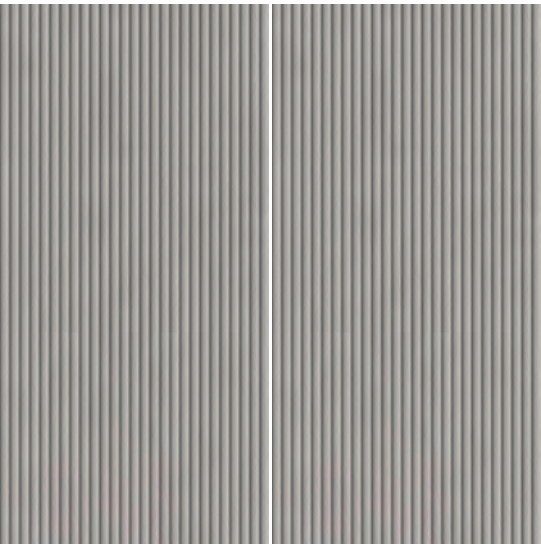

Tan



24"x48" R
UBALTIWALBE

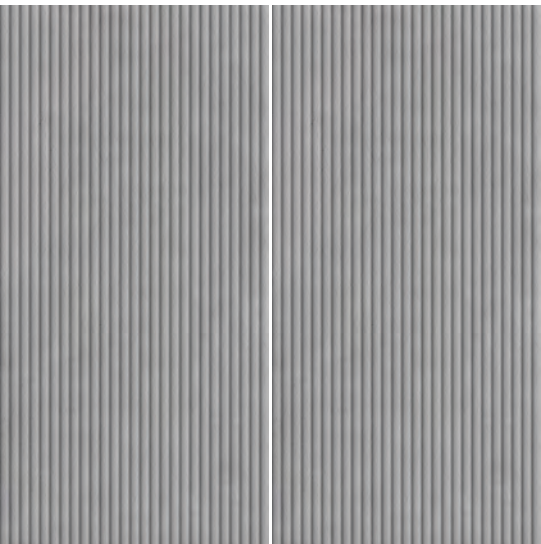


Granite




24"x48" R
UBALTIWALBI

Other Faces

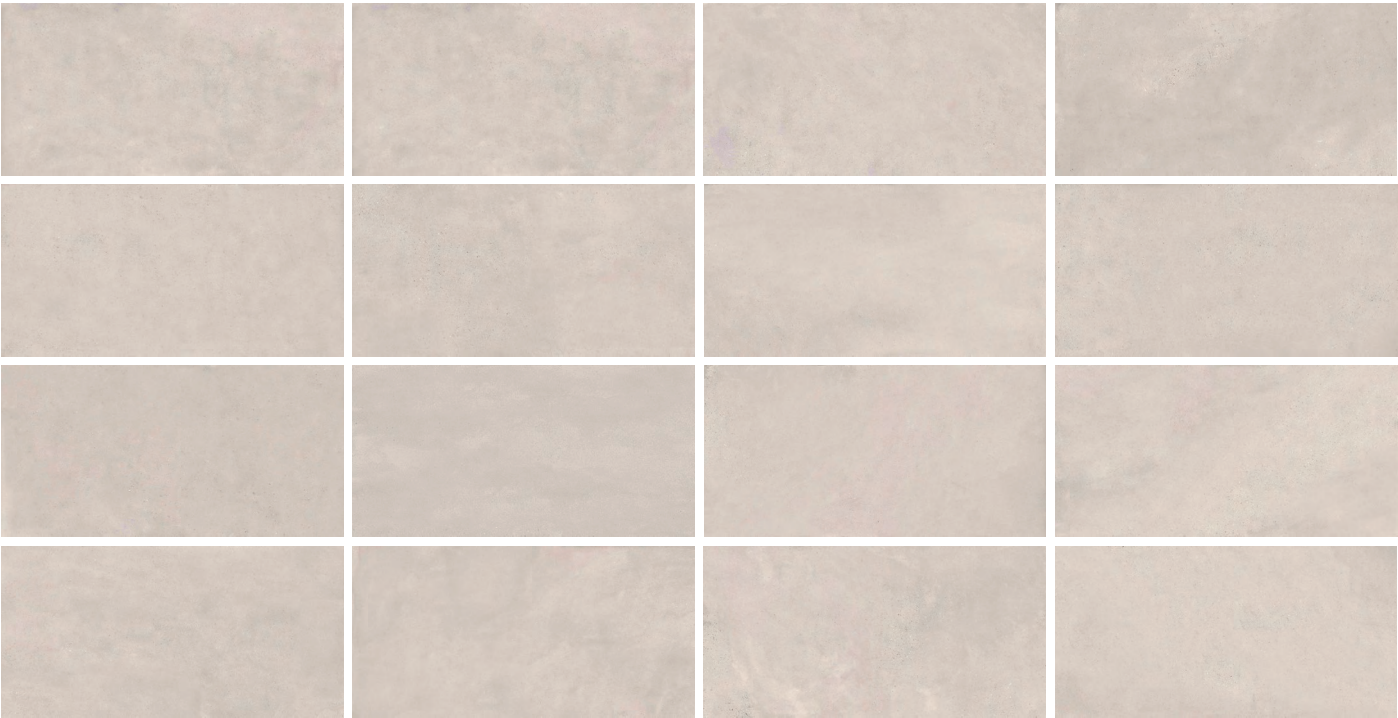

Sand

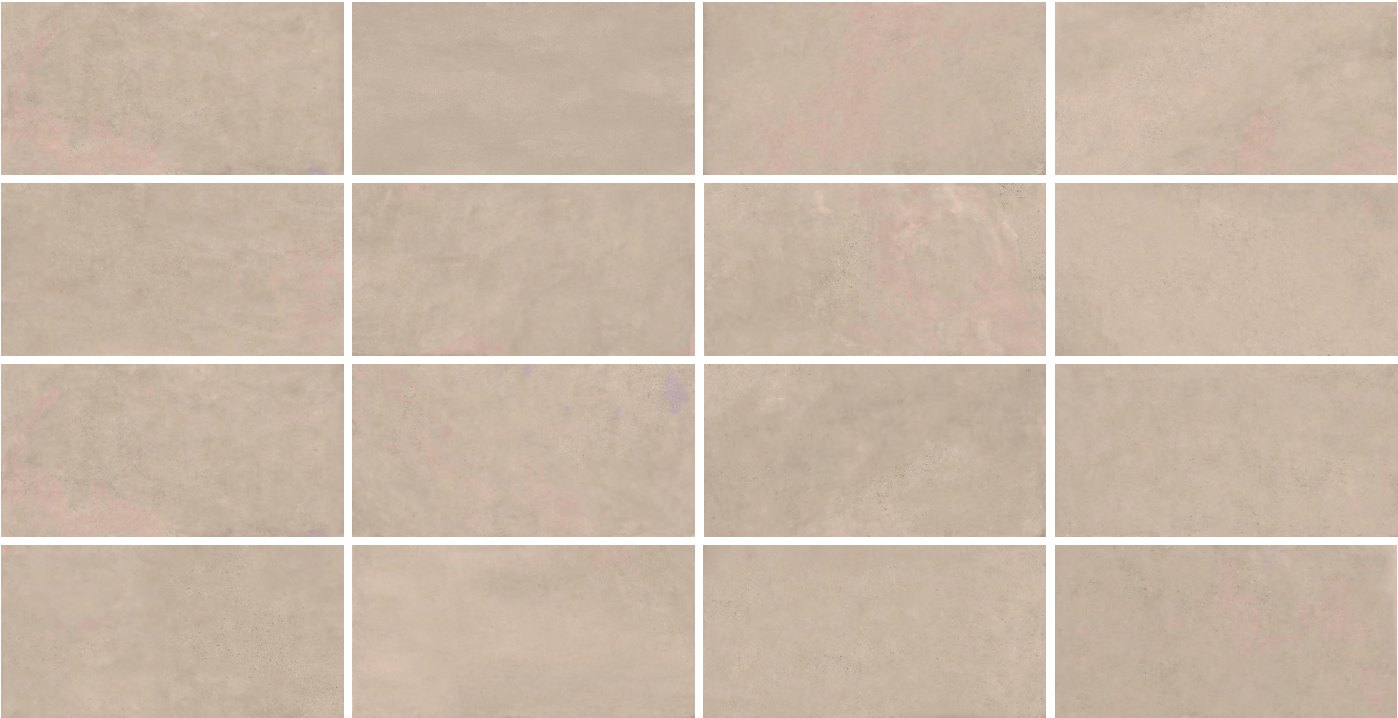


Tan


Other Faces




Granite

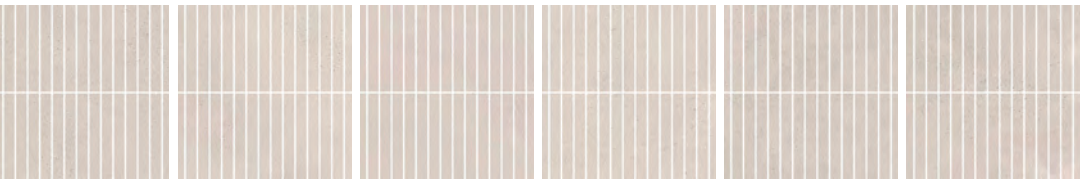

Sand 12"x12" Mosaic

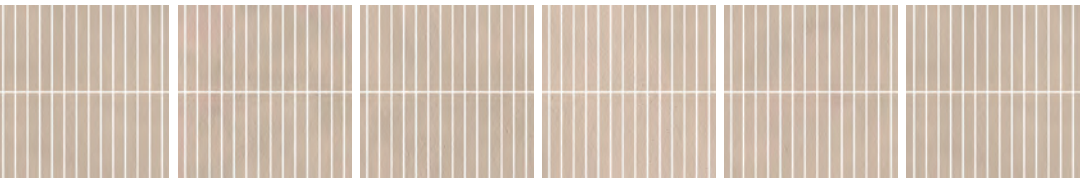

Sand 12"x12" Mosaic

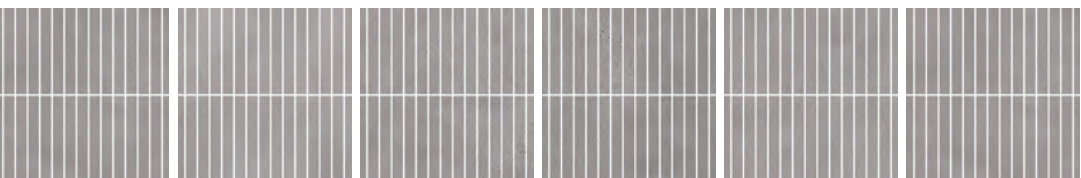

Sand 12"x12" Mosaic

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	Min. 1500 N
Chemical Resistance	C650	Class A (Resist) ¹
Stain Resistance	ISO-10545/14	5
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	ISO-10545/9	Resistant
Crazing Resistance	ISO-10545/11	Resistant
Group	See FAQ's	5
PEI- Glazed Tiles	C1027	PEI (V)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Packaging Info

Size	SF per carton	PC per carton
24"x48" R	15.38	2
12"x24" R	13.37	7
12"x12" Mosaic	9.62	10