



Roca

Avalon

Avalon

Elegance in essence. A distinctive fusion of stone textures and advanced technology in a floor-to-wall format for extraordinary porcelain tiles. Avalon is an exceptional fusion of stone textures, combined in a unique way.

Glazed Porcelain

48"x48" R, 24"x24" R, 24x48" R, 12"x24" R,
24"x36" R Pavers, 12"x36" R Suite

Avalon

Glazed Porcelain



48"x48" R
120x120 cm

24"x24" R
60x60 cm

24"x48" R
60x120 cm

12"x24" R
30x60 cm

12"x36" R
30x90 cm



Blanco



48"x48" R




24"x48" R




24"x24" R




12"x24" R

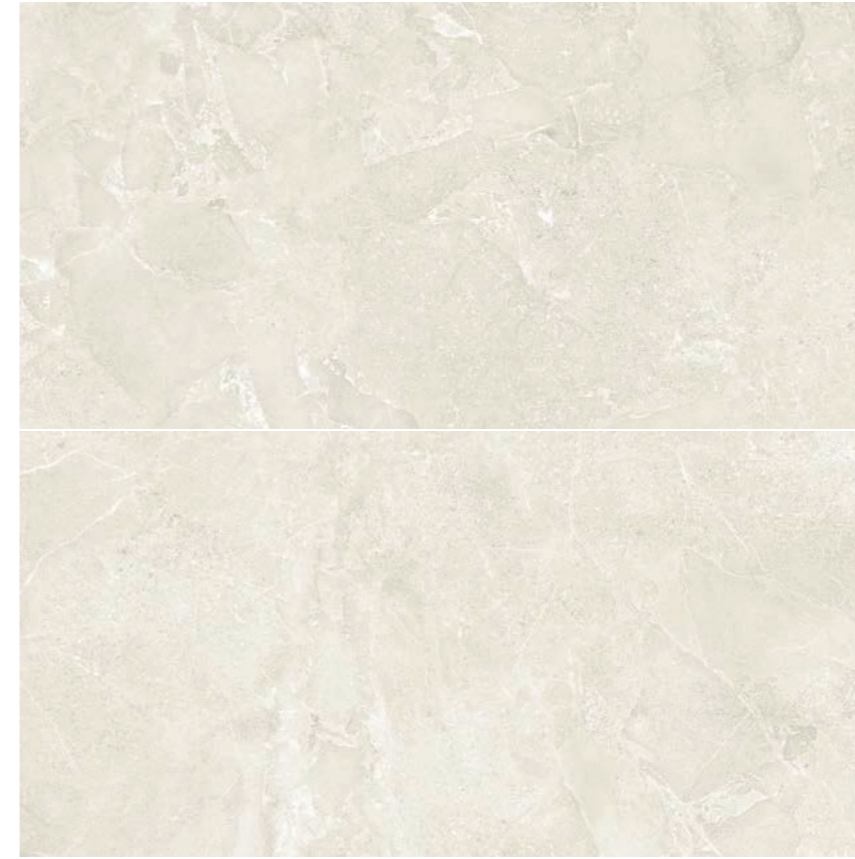

Arena



48"x48" R




24"x48" R



24"x24" R




12"x24" R

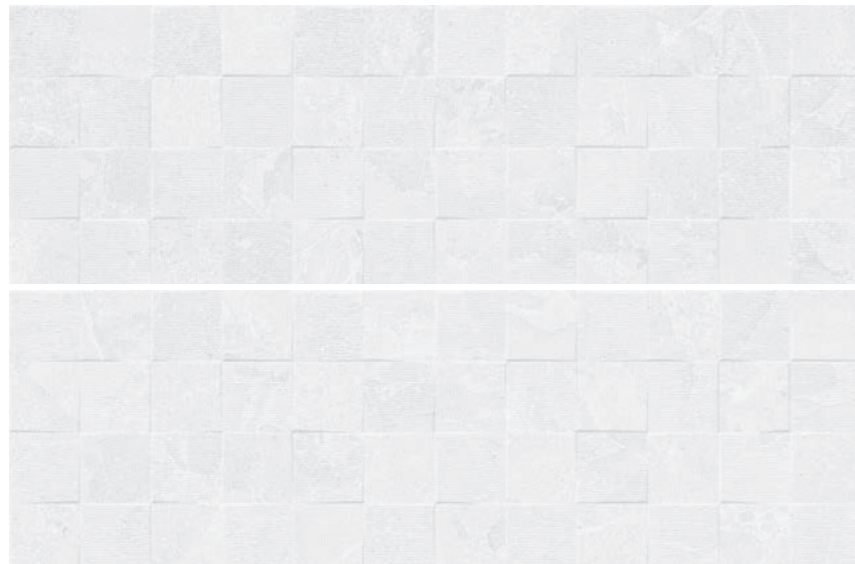

Suite Blanco



12"x36" R

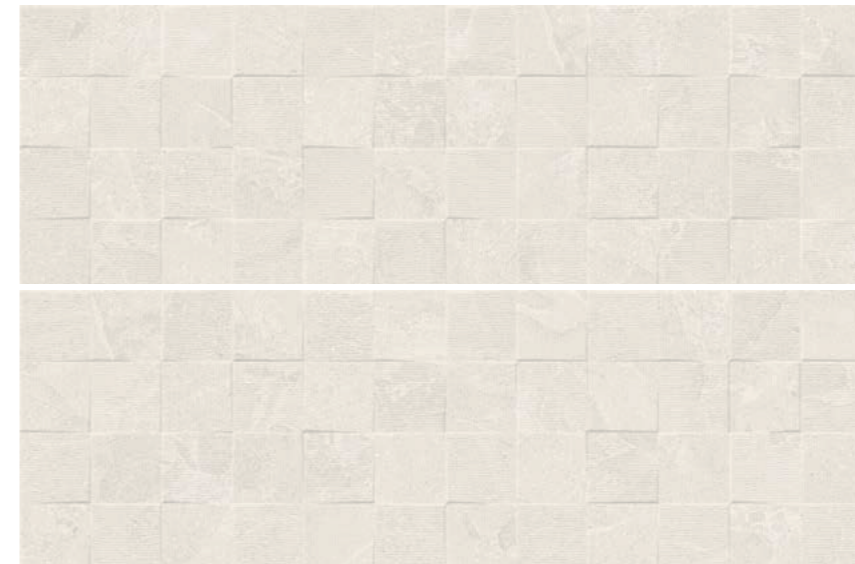

Suite Arena



12"x36" R

Avalon

Glazed Porcelain

Technical Specifications

| CHARACTERISTICS | STANDARD | DECLARED ASTM |
|--|-------------|---------------|
| Water Absorption | C373 | <=0.5% |
| Break Strength | C648 | Min. 350 |
| Scratch Hardness | MOH's Scale | 6 |
| Chemical Resistance | C650 | Unaffected |
| Frost Resistance | C1026 | Resistant |
| Group | See FAQ's | 4 |
| PEI - Glazed Tiles | C1027 | 5 |
| Minimum Bond Strength (PSI) | C482 | 165 |
| Dynamic Coefficient of Friction (DCOF) | A137.1 | >=0.50 |
| Shade and Texture Rating | CTDA "V" | V3 |
| Facial Dimensions | C499 | Pass |
| Range of Thickness | C499 | Pass |
| Warping | C485 | Pass |
| Wedging | C502 | Pass |

Technical Specifications (Suite)

| CHARACTERISTICS | STANDARD | DECLARED ASTM |
|--------------------------|-------------|---------------|
| Water Absorption | C373 | >=10% |
| Break Strength | C648 | Min. 250 |
| Scratch Hardness | MOH's Scale | - |
| Chemical Resistance | C650 | Unaffected |
| Group | SEE FAQS | 4 |
| Shade and Texture Rating | CTDA "V" | V3 |
| Facial Dimensions | C499 | Pass |
| Range of Thickness | C499 | Pass |
| Warping | C485 | Pass |
| Wedging | C502 | Pass |

Packaging Information


| Size | SF per carton | PC per carton | BX per pallet |
|-----------|---------------|---------------|---------------|
| 48"x48" R | 15.50 | 1 | 42 |
| 24"x24" R | 15.50 | 4 | 30 |
| 24"x48" R | 23.25 | 3 | 30 |
| 12"x24" R | 15.50 | 8 | 48 |

Packaging Information

| Size | SF per carton | PC per carton | BX per pallet |
|-----------|---------------|---------------|---------------|
| 12"x36" R | 14.53 | 5 | 51 |

Pavers Avalon


Color Body Porcelain Stoneware



24"x36" R
60x90 cm




Avalon Rock Blanco



24"x36" R



Avalon Rock Arena



24"x36" R



Pavers Avalon Blanco 24"x36" R

Pavers Avalon

Color Body Porcelain Stoneware

Technical Specifications

| CHARACTERISTICS | STANDARD | DECLARED ASTM |
|--|-----------------|-------------------------------|
| Water Absorption | C373 | ≤ 0.5 |
| Break Strength | C648 | Min. 2800 |
| Chemical Resistance | C650 | Class A (Resist) ¹ |
| Stain Resistant | C1378 | Class A |
| Frost Resistance | C1026 | Resistant |
| Group | See FAQ's | 4 |
| PEI Glazed Tiles | C1027 | 4 |
| Dynamic Coefficient of Friction (DCOF) | A137.1 | ≥ 0.42 |
| Shade and Texture Rating | CTDA "V" | V3 |
| Facial Dimensions | C499 | Pass |
| Range of Thickness | C499 | Pass |
| Warping | C485 | Pass |
| Wedging | C502 | Pass |

Packaging Info

| Size | SF per carton | PC per carton | BX per pallet |
|-------------|----------------------|----------------------|----------------------|
| 24"x36" R | 7.80 | 1 | 40 |