



EVOLUX
LUXURY EVOLVING



Our commitment to innovation and quality has led us to introduce our new LVT category, we've developed a collection that not only meets but exceeds the expectations of modern living spaces. Our LVT range offers unparalleled versatility, performance, and aesthetics.

EVOLUX is engineered to withstand heavy foot traffic and daily wear, ensuring lasting beauty in any space. Our portfolio owns a nice array of styles from classic elegance to contemporary chic, ready to serve residential and commercial projects. EVOLUX matched with Roca Tile excellent customer service is a guarantee for success.



Powell Oak 7"x48"

Table of contents

Lotus	06
Lotus +	10
Powell	12
Fume	14
Iris	16
Apres	20
Packaging Information -	24
Technical Specifications -	
Installation - Care - Warranty	

Lotus

Glue Down

2

mm

Finish

Diamond Guard

Health Guard

7"x48"

18x122 cm

12 mil - Wood Embossed

The Lotus Series captures the classic look of natural wood, presenting a simple yet elegant aesthetic ideal for any space that desires a touch of natural beauty.



Blonde

7"x48"
EVL0TU1003



Taupe

7"x48"
EVL0TU1007



Snow

7"x48"
EVL0TU1005



Lotus Blonde 7"x48"



Lotus Taupe 7"x48"

Lotus

Glue Down

2

mm

Finish

Diamond Guard

Health Guard

7"x48"

18x122 cm

12 mil - Wood Embossed



Ash



7"x48"
EVLOTUL005



Cocoa



7"x48"
EVLOTU1008



Maple



7"x48"
EVLOTU1006



Lotus Snow 7"x48"



Lotus Taupe 7"x48"

Lotus +

Glue Down

2.5

mm

Finish





7"x48"

18x122 cm

20 mil - Wood Embossed

Lotus + enhances the home with its wood-like appearance that is as authentic as it is welcoming, setting the stage for warm and sophisticated interiors.



Honey

7"x48"
EVLOTU3005



Maple

7"x48"
EVLOTU3002



Smoke

7"x48"
EVLOTU3003



Powell

Glue Down

2.5

mm

Finish

NANO SILVER

COATING

7"x48"

18x122 cm

20 mil - Wood Embossed

The Powell Series showcases the grandeur and depth of traditional wooden floors, providing a robust and rich visual anchor for any room.



Silver

7"x48"

EVPOWEL01



Oak

7"x48"

EVPOWEL05



Weath

7"x48"

EVPOWEL12



Powell Driftwood 7"x48"



Driftwood

7"x48"

EVPOWE604



Oregon

7"x48"

EVPOWE504



Ridge

7"x48"

EVPOWE607

Fume

SPC Rigid Core Click Floating

*Coordinating Trims Available
T-mold, reducer, stairnosing.

4.5 mm



Finish
NANO SILVER
COATING

IXPE Pad Attached

7"x48"
18x122 cm

12 mil - Wood Embossed

Fume offers a bold and dramatic wood-inspired look, its deep tones providing a strong and sophisticated foundation for a variety of decor styles.



Fume Maple 7"x48"



Cotton



7"x48"
EVFUMETL4



Maple



7"x48"
EVFUMEL07



Silk



7"x48"
EVFUMEL03



Canela



7"x48"
EVFUME3L5



Honey



7"x48"
EVFUMEL04



Tabacco





7"x48"
EVFUME623

Iris

SPC Rigid Core Click Floating

*Coordinating Trims Available
T-mold, reducer, stairnosing.

 5 mm



Finish

NANO SILVER

IXPE Pad Attached

COATING

7"x48"

18x122 cm

20 mil - Wood Embossed

Bright and inviting, the Iris Series mirrors the light, natural tones of softwood, infusing spaces with an airy and open ambiance.



Off White



7"x48"
EVIRISL002




Almond



7"x48"
EVIRISL139



Oak



7"x48"
EVIRISL004



Iris Off White 7"x48"



Iris Almond 7"x48"




Iris Oak 7"x48"


Iris

SPC Rigid Core Click Floating

*Coordinating Trims Available
T-mold, reducer, stairnosing.



5 mm



Finish

NANO SILVER

IXPE Pad Attached

COATING

7"x48"

18x122 cm

20 mil - Wood Embossed



Iris Walnut 7"x48"



Bleached



7"x48"
EVIRISL005



Walnut



7"x48"
EVIRISL601



Maple



7"x48"
EVIRISL015



Oil



7"x48"
EVIRISL003



Blonde



7"x48"
EVIRISL012



Smoke



7"x48"
EVIRISL011

5.5

mm

Finish

Diamond Guard

Health Guard

Unilin

IXPE Pad Attached

9"x60"
23x152 cm

20 mil - EIR (Embossed in Registered)
Bevel: Painted Micro-Bevel

The Apres Series embodies the cozy charm of wooden aesthetics, reminiscent of a relaxing mountain hideaway, ideal for creating a warm and inviting atmosphere.



Apres Galao 9"x60"



Panna



9"x60"
EVAPRES004



Latte



9"x60"
EVAPRES002



Galao



9"x60"
EVAPRES006



Espresso



9"x60"
EVAPRES007



Macchiato



9"x60"
EVAPRES003



Mocha



9"x60"
EVAPRE005

5.5
mm

Finish

Diamond Guard

Health Guard


Unilin

IXPE Pad Attached

9"x60"
23x152 cm

20 mil - EIR (Embossed in Registered)
Bevel: Painted Micro-Bevel

TriCore™ Premium Construction

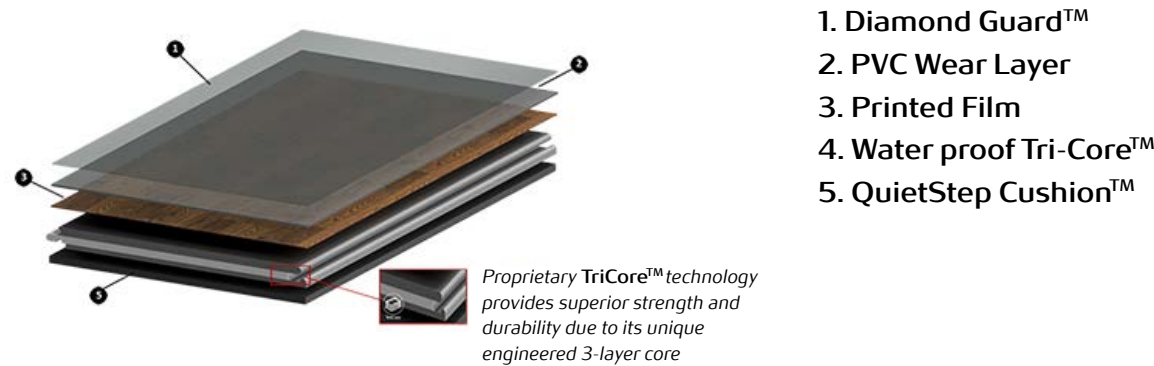

Caramel

9"x60"
EVAPRE5005



Irish

9"x60"
EVAPRES008



Apres Irish 9"x60"







Apres Latte 9"x60"





Apres Caramel 9"x60"

Technical Specifications - Glue Down

Lotus 12mil Glue Down		
	Standard	Result
Thickness		2.0mm
Size		7"x48"
Material		Virgin Vinyl
Wear Layer		12 mil
Surface Treatment		Diamond Guard / Health Guard
Surface Texture		Wood Emboss
Warranty	Commercial / Residential	10 year Light Commercial / Limited Lifetime Residential
Installation		Glue down
Beveled Edge		No
Classification		Class III Type B
Reaction to fire	ASTM F1700	Class 1
Smoke Density	ASTM E648-06	Class 1
Slip resistance	ASTM E662-06	Pass <450
Staining resistance	ASTM C1028	Pass ADA Compliant (>0.50)
Light Resistance	ASTM F925	Pass
Abrasion resistance	ASTM F1514	Pass
Dimensional stability	ASTM D4060-14	Pass
Acoustic impact noise reduction	ASTM F2199	Pass 0.011 in / ft <0.020 in / ft
	ASTM E2179-09 ASTM E492-09	ΔIIC = 4 dB
Static load		Pass 1000 psi / 250 psi (<0.005 in)
Flexibility	ASTM F970	Pass
Phthalate free	ASTM F137	Yes
<div><div></div><div></div></div>		

Lotus + 20mil Glue Down		
	Standard	Result
Thickness		2.5 mm
Size		7"x48"
Material		Virgin Vinyl
Wear Layer		20 mil
Surface Treatment		Diamond Guard / Health Guard
Surface Texture		Wood Emboss
Warranty	Commercial / Residential	15 year Commercial / Limited Lifetime Residential
Installation		Glue down
Beveled Edge		No
Classification		Class III Type B
Reaction to fire	ASTM F1700	Class 1
Smoke Density	ASTM E648-06	Class 1
Slip resistance	ASTM E662-06	Pass <450
Staining resistance	ASTM C1028	Pass ADA Compliant (>0.50)
Light Resistance	ASTM F925	Pass
Abrasion resistance	ASTM F1514	Pass
Dimensional stability	ASTM D4060-14	Pass
Acoustic impact noise reduction	ASTM F2199	Pass 0.011 in / ft <0.020 in / ft
	ASTM E2179-09 ASTM E492-09	ΔIIC = 4 dB
Static load		Pass 1000 psi / 250 psi (<0.005 in)
Flexibility	ASTM F970	Pass
Phthalate free	ASTM F137	Yes
<div><div></div><div></div></div>		



Powell 20mil Glue Down		
	Standard	Result
Thickness		2.5 mm
Size		7"x48"
Material		100% Virgin Vinyl
Wear Layer		20 mil
Surface Treatment		Nano Silver Coating
Surface Texture		Wood Emboss
Warranty	Commercial / Residential	15 year Commercial / Limited Lifetime Residential
Installation		Glue down
Beveled Edge		No
Classification		Class III Type B
Reaction to fire	ASTM F1700	Class 1
Smoke Density	ASTM E648-06	Class 1
Coefficient of Friction	ASTM E662-06	Pass <450
Staining resistance	ASTM C1028	Pass ADA Compliant (.0.50)
Light Resistance	ASTM F925	Pass
Abrasion resistance	ASTM F1515	Pass
Dimensional stability	ASTM D4060	Pass
Acoustic impact noise reduction	ASTM F2199	Pass
	ASTM E2179-09 ASTM E492-09	ΔIIC = 4 dB
Static load		Pass
Flexibility	ASTM F970	Pass
Phthalate free	ASTM F137	Yes
<div><div></div><div></div></div>		

Technical Specifications - Rigid Core

Fume Rigid Core - 12mil		
	Standard	Result
Thickness		4.5mm
Size		7"x48"
Material		SPC
Wear Layer		12 mil
Surafce Treatment		Nano Silver Coating
Surface Texture		Wood Emboss
Padding		1mm IXPE
Warranty	Commercial / Residential	10 year Commercial / Limited Lifetime Residential
Installation		Unilin Click
Beveled Edge		No
Smoke Density	ASTM E662-06	Pass <450
Slip resistance	ASTM C1028	Pass
Staining resistance	ASTM F925	Pass
Light Resistance	ASTM F1515	Pass
Abrasion resistance	ASTM D4060	Pass
Dimensional stability	ASTM F2199	Pass
Acoustic impact noise reduction IIC	ASTM E492-09	IIC = 62 dB concrete slab 6" drop ceiling
Calculated Sound Tranmission STC	ASTM E413-16	STC = 68 db
Static load	ASTM F970-17	Pass
Indentation	ASTM F1914	Pass
Phthalate free		Yes
<div><div><div><div></div><div>floor score</div><div>by TUV SUD</div></div><div><div>GREENGUARD</div><div>GREENGUARD CERTIFIED</div><div>GREENGUARD</div></div><div><div>PHthalate FREE</div><div>by TUV SUD</div></div></div></div>		

Iris Rigid Core - 20mil		
Thickness		5.0mm
Size		7"x48"
Material		SPC
Wear Layer		20 mil
Surafce Treatment		Nano Silver Coating
Surface Texture		Wood Emboss
Padding		1mm IXPE
Warranty	Commercial / Residential	15 year Commercial / Limited Lifetime Residential
Installation		Unilin Click
Beveled Edge		No
Smoke Density	ASTM E662-06	Pass <450
Static Coefficient of Friction	ASTM C1028	Pass
Chemical Resistance	ASTM F925	Pass
Resistance to light	ASTM F1515	Pass
Abrasion resistance	ASTM D4060	Pass
Dimensional stability	ASTM F2199	Pass
Acoustic impact noise reduction IIC	ASTM E492-09	IIC = 62 dB 6" concrete slab drop ceiling
Calculated Sound Tranmission STC	ASTM E413-16	STC = 68 db
Static load	ASTM F970	Pass
Indentation	ASTM F1914	Pass
Phthalate free		Yes
<div><div><div><div></div><div>floor score</div><div>by TUV SUD</div></div><div><div>PHthalate FREE</div><div>by TUV SUD</div></div></div></div>		

Apres Rigid Core - 20mil		
	Standard	Result
Thickness		5.5mm
Size		9"x60"
Material		SPC Tricore
Wear Layer		20 mil
Surafce Treatment		Diamond Guard / Health Guard
Surface Texture		EIR Registered Embossed
Padding		1mm IXPE
Warranty	Commercial / Residential	15 year Commercial / Limited Lifetime Residential
Installation		Unilin Click
Beveled Edge		Painted Micro-bevel
Smoke Density	ASTM E662-19	Pass
Static Coefficient of Friction	ASTM C1028-07e1	Pass
Chemical Resistance	ASTM F925	Pass
Resistance to light	ASTM F1514	Pass
Abrasion resistance	ASTM D4060-14	Pass
Dimensional stability	ASTM F2199	Pass
Acoustic impact noise reduction IIC	ASTM E492-09	IIC = 68 dB 6" concrete slab drop ceiling
Static load	ASTM F970	Pass
Indentation	ASTM F1914	Pass
Phthalate free		Yes
<div><div><div><div></div><div>floor score</div><div>by TUV SUD</div></div><div><div>PHthalate FREE</div><div>by TUV SUD</div></div></div></div>		

						
	Pieces	Sf	Lbs	Boxes	Sf	Lbs
Lotus						
Lotus 7"x48"	14	32.70	27.06	85	2,779.50	2,300.00
Lotus +						
Lotus + 7"x48"	15	35	36.66	60	2,100.00	2,200.00
Powell						
Powell 7"x48"	18	44.18	45.80	55	2,429.90	2,519.00
Fume						
Fume 7"x48"	12	28.68	44.10	60	1,720.80	2,646.00
Iris						
Iris 7"x48"	10	23.90	42.03	60	1,434.00	2,522.00
Apres						
Apres 9"x60"	8	30.18	52.91	44	1,327.92	2,328.00

INSTALLATION

LVP floors can be installed using several methods, depending on the type of product.

Here are some common installation methods:

Click-lock Installation:

Some luxury vinyl plank floors feature a click-lock system that allows the planks to be securely snapped together without adhesive. This method offers additional locking mechanisms for a tighter fit. Click-lock installation is fast and easy and provides a strong, stable result. UNILIN Locking system. Angle / Angle

Glue-down Installation:

Some luxury vinyl plank floors require adhesive to be applied to the subfloor before the planks are installed. This method provides a more permanent installation and may be preferred in areas with heavy foot traffic or moisture concerns. It can be more challenging and time-consuming than floating click installation, but it offers a more stable and secure result.

Regardless of the installation method you choose, it is important to prepare the subfloor properly before installing luxury vinyl plank floors. This may involve cleaning, leveling, and priming the subfloor to ensure a smooth and stable surface for installation.

CARE
EVERYDAY CLEANING OF EVOLUX

Low maintenance and easy cleaning are two of the key advantages of having Evolux on your floors. After installation, you should not clean the area or move furniture into it until the adhesive has completely dried.

Take these easy daily cleaning procedures to maintain the best-looking floor:

To get rid of dirt or grit, sweep your floors.

Mop with a pH neutral, fragrance free cleaner approved to use with vinyl floors. Routine maintenance with will

effectively kill and remove germs on the floor’s surface.

Allow your floor to dry completely before walking on it.

Think about the following advice to maintain the best possible condition for your LVT flooring:

Lift Furniture Entirely: Always raise heavy furniture completely off the ground when moving it. Your LVT flooring may get dents and scratches from dragging furniture.

Make Use of Furniture Pads Underneath the legs of heavy furniture such as tables and chairs, place felt protection or furniture pads. By preventing furniture from coming into close touch with the floor, these pads lower the possibility of damage.

Area Rugs and Mats: Place area rugs or mats in places that get a lot of foot traffic. They serve as a buffer, preventing furniture movement and foot activity from scratching and scuffing your LVT.

Clip Pet Nails: Make sure your pets’ nails are kept neat and tidy. The surface of LVT flooring might get scratches from puppy claws.

Steer clear of abrasive cleaners: Sturdy substances and abrasive cleaning equipment can damage LVT. For routine maintenance, use soft towels and mild cleaning solutions. Maintaining the longevity and beauty of your premium vinyl flooring just requires a small amount of maintenance!

WARANTY

Product	Format	Residential	Commercial
Lotus	12mil Gluedoown	Limited Lifetime	10 years
Lotus +	20mil Gluedoown	Limited Lifetime	15 years
Powell	20mil Gluedoown	Limited Lifetime	15 years
Fume	12mil SPC - floating/ click	Limited Lifetime	10 years
Iris	20mil SPC - floating/ click	Limited Lifetime	15 years
Apres	20mil Premium EIR SPC - floating/ click	Limited Lifetime	15 years

WHAT THE WARRANTY COVERS?

Manufacturing Defects: EvoLux Floors ensures that the floating click product will be free from any manufacturing defects during the period of this warranty Wear: EvoLux Floors ensures that during the period of the warranty, wear due to normal foot traffic will not change the visual aspects of the product.



Apres Panna 9"x60"

Locations

Miami, FL.

Showroom & Distribution Center:
11190 NW 25th St.
Miami, FL 33172

Chicago, IL.

Distribution Center:
1330 Mark Street
Elk Grove Village, IL 60007

Houston, TX.

Showroom & Distribution Center:
7100 Business Park Dr., Suite 250
Houston, TX 77041

Edison, NJ.

Showroom & Distribution Center:
74 Carter Dr.
Edison, NJ 08817

Anaheim, CA.

Showroom & Distribution Center:
1222 E. Howell Ave. Suite A.
Anaheim, CA 92805

Hayward, CA.

Showroom & Distribution Center:
1857 Sabre St.
Hayward, CA 94545

Design Showrooms

Miami, FL.

Design District:
3886 Biscayne Blvd.
Miami, FL 33137

Chicago, IL.

Downtown Showroom:
215 W Illinois St
Chicago, IL 60654

Manhattan, NY.

Downtown Showroom:
19 W 21st Street, Suite #603
New York, NY 10010

Coming Soon

Atlanta, Georgia

Showroom & Distribution Center:
5775 Commerce Boulevard
Alpharetta, GA 30004

The Roca logo features the word "Roca" in a bold, white, sans-serif font. Below the text is a stylized white wave graphic that underlines the letters.

Roca Tile USA Inc.

11190 NW 25th St.
Miami, FL 33172

(800) 321 0684

www.rocatileusa.com